




Supports 64 /128CH 8MP / 6MP / 5MP / 4MP / 3MP / 1080P / 1280 × 1024 / 960P /720P high definition IP video input, which adopts the most advanced SOC technique to ensure high definition recording in each channel and realize outstanding robustness of the system.
Supports 64/128 CH IP input, simultaneous 16 CH playback, and 4K high definition display. The series of products can meet different security requirements of home, financial, commerce, enterprise, transportation and government, etc.

Product Features

- ▲ Support 64/128CH 12MP /8MP / 6MP / 5MP / 4MP / 3MP / 1080P / 1280 × 1024 / 960P / 720P IP video input
- ▲ Adopt standard H.265 high profile compression format to get high-quality video at much lower bit rate
- ▲ Intuitive and user-friendly Graphic User Interface (GUI), Windows style operation by mouse
- ▲ Multi-mode recording: manual / timer / motion / sensor / smart events
- ▲ Playback : 16 CH simultaneous playback
- ▲ Search : time slice, time, event, tag, smart and target database search
- ▲ Supports face detection and comparison
- ▲ Supports multiple VCA (Video Content Analytics) events, such as object abandoned/missing, region intrusion, tripwire, video tampering, etc.
- ▲ Supports POS information overlay on live view and playback
- ▲ Support RAID0, 1, 5, 6, 10
- ▲ Express and flexible backup via USB, network and so on
- ▲ Pentaplex : preview, record, playback, backup and remote access
- ▲ DHCP, DDNS, PPPoE network protocol
- ▲ Remote control via Web Client or CMS : preview, playback, backup, PTZ and configuration
- ▲ Dual stream technology for local storage with high definition, remote network transmission and remote surveillance with mobile device
- ▲ Multi-user online simultaneously
- ▲ Authorization management, log view and device status view
- ▲ 4K HD output, true high resolution display
- ▲ Supports PTZ preset and auto cruise, up to 255 presets and 8 cruises
- ▲ Supports NAT function and QRCode scanning by mobile phones
- ▲ Powerful mobile surveillance by smart phones with iOS and Android OS

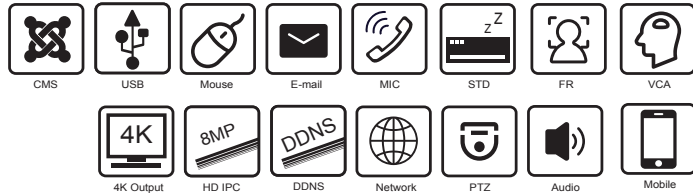


SPECIFICATION

Model		QVN3364-16	QVN33128-16
System	OS	Embedded Linux	
Video	IP Video Input	64 CH	
	Incoming/ Bandwidth (Mbps)	640	640
	Outgoing Bandwidth (Mbps)	Display Priority: 128 Network Priority: 640	Display Priority: 128 Network Priority: 640
	IP Video Input Resolution	12MP /8MP/ 6MP/5MP/4MP/3MP/1080P/1280×1024/960P/720P/960H/D1/CIF	
	Output	HDMI1: 3840 × 2160@60fps / 3840 × 2160@30fps/ 1920 × 1080 / 1280 × 1024/ 1024 × 768 HDMI2: 1920 × 1080 / 1280 × 1024/1024 × 768 HDMI3: 1920 × 1080 / 1280 × 1024 / 1024 × 768 HDMI4: 1920 × 1080 / 1280 × 1024 / 1024 × 768 VGA × 1 : 1920 × 1080 / 1280 × 1024 / 1024 × 768	
	Compression	Standard H.264 / H.265	
Audio	Network Input	16 CH IPC audio input	32 CH IPC audio input
	2-way Audio	RCA × 1	
	Local Output	RCA × 1	
	HDMI Audio Output	Yes	
	Compression	G.711(U/A)	
Record	Record Stream	Dual stream recording	
	Resolution	12MP/ 8MP/ 6MP/5MP/4MP/3MP/1080P/1280×1024/960P/720P/960H/D1/CIF	

Record	Frame Rate	25fps (PAL) / 30fps(NTSC)	
	Mode	Manual, timer, motion, sensor, smart events	
Playback	Simultaneous Playback	Max 16 CH	
	Search	Time slice / time / event / tag search	
	Smart Search	Highlighted color to display the camera record in a certain period of time, different colors refers to different record events	
Decoding Capability	Live View/ Playback	1CH 12MP/4CH 5MP/9CH 720P/16CH 720P	
Alarm	Mode	Manual, sensor, motion, exception, smart events	
	Input	24 CH local alarm input; supports IPC alarm input	
	Output	8 CH	
	Triggering	Record, snap, preset, e-mail, etc.	
Face	Face Detection Performance (AI by IPC)	64 CH	128 CH
	Face Detection Performance (AI by Device)	4 CH	
	Face Match Performance	16 CH	
	Comparison Capability	36 pictures / second	
	Face Picture Database	32 libraries 10000 Face Pictures	
	Face Picture Search	Search by picture is supported	
	Database Management	Add, modify, delete and search face pictures	
	Face Picture Adding	Add face pictures through APP, WEB and external import	
	External face picture enrollment	Resolution: 128 x 128 ~ 1920 x 1080 Size: ≤ 70KB Format : jpg&jpeg	
	Face Picture Comparison	Support allow list, block list and stranger match alarm	
	Face Track	Yes	
	Map of Face Track	Resolution: 2560 x 1920 Size: ≤ 512KB Format : jpg&jpeg	
	Statistic Graph of Face Information	Bar graph	
	Statistic Mode of Face Information	Statistics by day, week, month, quarter as well as customized time period	
Network	Interface	RJ45 10 / 100 / 1000 Mbps × 2	
	Protocol	TCP / IP, PPPoE, DHCP, DNS, DDNS, UPnP, NTP, SMTP, HTTP, HTTPS, 802.1X, RTSP, ONVIF	
Mobile Device	OS	iOS, Android	
Storage	HDD Interface	SATA × 16, max 10T per HDD; e-SATA × 1	
	RAID Type	RAID0, 1, 5, 6, 10	
Backup	Local Backup	U disk, USB mobile HDD	
	Network Backup	Yes	

External Interface	USB	USB 2.0 × 2, USB 3.0 × 1
	Remote Controller	Optional
	RS 485	Yes (full-duplex), connect to PTZ or keyboard
	RS 232	Yes
	Reset	Yes
Others	Power Supply	ATX 300W
	Consumption	≤ 50W (without HDD)
	Dimensions (mm)	437 × 483 × 143
	Work Environment	-15 ~ 50 ℃ , 10% ~ 90% humidity

Dimensions

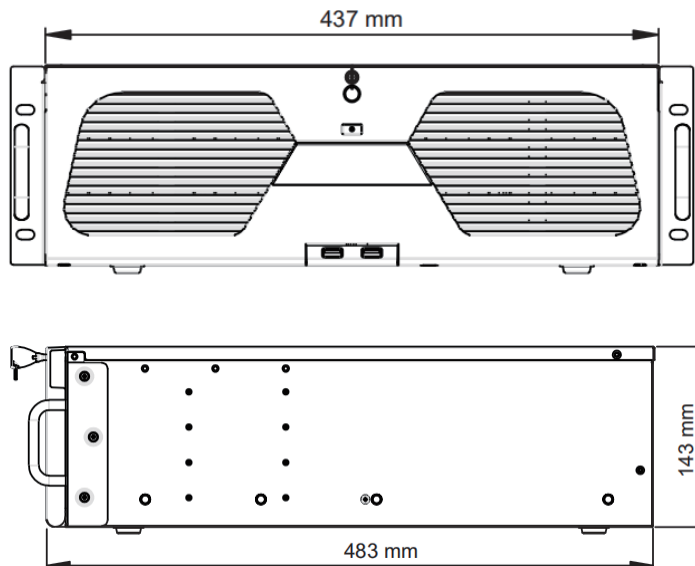

Rear Panel

